




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : H04N 1/40		A1	(11) International Publication Number: WO 91/02425
			(43) International Publication Date: 21 February 1991 (21.02.91)
(21) International Application Number: PCT/CA90/00246		(72) Inventors ; and	
(22) International Filing Date: 31 July 1990 (31.07.90)		(75) Inventors/Applicants (for US only) : JAFFRAY, Ian [CA/CA]; 3 Chicora Avenue, Toronto, Ontario M5R 1T7 (CA). BRONSKILL, John, F. [CA/CA]; 43 Beran Drive, Scarborough, Ontario M1G 1G3 (CA).	
(30) Priority data: 387,049 31 July 1989 (31.07.89) US		(74) Agent: ROGERS, BERESKIN & PARR; 40 King Street West, 40th Floor, Toronto, Ontario M5H 3Y2 (CA).	
(60) Parent Application or Grant (63) Related by Continuation US Filed on 387,049 (CIP) 31 July 1989 (31.07.89)		(81) Designated States: AT, AT (European patent), AU, BB, BE (European patent), BF (OAPI patent), BG, BJ (OAPI patent), BR, CA, CF (OAPI patent), CG (OAPI patent), CH, CH (European patent), CM (OAPI patent), DE*, DE (European patent)*, DK, DK (European patent), ES, ES (European patent), FI, FR (European patent), GA (OAPI patent), GB, GB (European patent), HU, IT (European patent), JP, KP, KR, LK, LU, LU (European patent), MC, MG, ML (OAPI patent), MR (OAPI patent), MW, NL, NL (European patent), NO, RO, SD, SE, SE (European patent), SN (OAPI patent), SU, TD (OAPI patent), TG (OAPI patent), US.	
(71) Applicant (for all designated States except US): IMAGE-WARE RESEARCH AND DEVELOPMENT, INC. [CA/CA]; Berkeley Castle, 2 Berkeley Street, Ste 401, Toronto, Ontario M5A 4J5 (CA).		Published With international search report.	

(54) Title: APPARATUS AND METHOD FOR TRANSFORMING A DIGITIZED SIGNAL OF AN IMAGE

(57) Abstract

The apparatus and method employ a variety of units, including Laplacian filters (6), rank value filters (4), edge detectors (28), gain units (8) and summation units (10), to transform an input digitized signal (2) of an image, the transformation being carried out for each pixel independently. The various elements are combined to produce a variety of desired visual effects, e.g. a brush stroke effect, edge enhancement or the appearance of a reflective chrome surface. Further, an apparatus is provided in which a conditioning unit generates a conditioning function, which enables different parts of an image to be combined in accordance with different methods. Thus, a foreground of an image could have the edge content reinforced, whilst the background has brushstroke texture added.

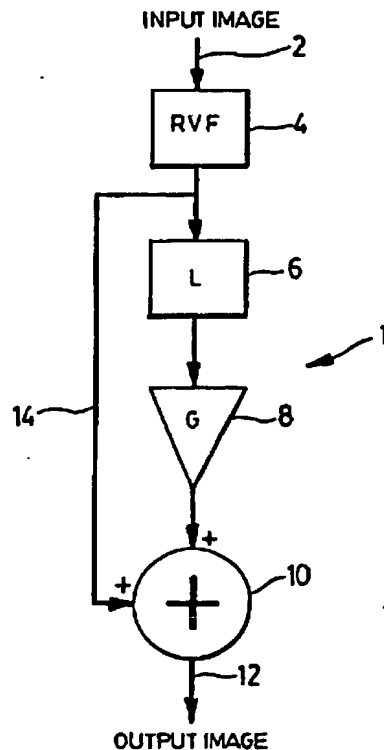

DESIGNATIONS OF "DE"

Until further notice, any designation of "DE" in any international application whose international filing date is prior to October 3, 1990, shall have effect in the territory of the Federal Republic of Germany with the exception of the territory of the former German Democratic Republic.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	ES	Spain	MC	Monaco
AU	Australia	FI	Finland	MG	Madagascar
BB	Barbados	FR	France	ML	Mali
BE	Belgium	GA	Gabon	MR	Mauritania
BF	Burkina Faso	GB	United Kingdom	MW	Malawi
BG	Bulgaria	GR	Greece	NL	Netherlands
BJ	Benin	HU	Hungary	NO	Norway
BR	Brazil	IT	Italy	PL	Poland
CA	Canada	JP	Japan	RO	Romania
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	LJ	Liechtenstein	SN	Senegal
CM	Cameroon	LK	Sri Lanka	SU	Soviet Union
DE	Germany	LJ	Luxembourg	TD	Chad
DK	Denmark			TG	Togo
				US	United States of America

5 APPARATUS AND METHOD FOR TRANSFORMING A
 DIGITIZED SIGNAL OF AN IMAGE

Field of the Invention

 This invention relates to both method and
 apparatus for transforming pictures or images. More
10 particularly, it relates to a method or apparatus for
 effecting a transformation of a digitized signal of an
 image to achieve a drawn, painted or other selected
 appearance.

Background of the Invention

15 Both colour and black and white photography are
 in widespread use for both still and moving pictures. In
 the television field at least, numerous techniques have
 been used for manipulating a television picture in various
 ways, e.g. by adding or inserting a second image into a
20 window in a first image. However, the basic picture itself
 remains essentially unchanged.

 There is also a known technique of
 "posterisation", which essentially reduces the image to
 individual areas of solid, uniform colour, rather than
25 progressive changes in colour.

 If one wants to achieve a hand drawn or painted
 appearance, then the principal current way of achieve this
 is to simply have a skilled artist draw or paint his
 perception of the subject in a chosen style, using
30 conventional instruments such as pen, pencil and
 paintbrush.

 The use of an artist is acceptable in some
 circumstances, and indeed it is almost certain that a
 human artist can always add some effect or detail that can
35 never be achieved by a machine. Nonetheless, for many
 subjects, the use of an artist is either prohibitively
 expensive or unnecessarily time consuming. In particular,
 if one wishes to add such an effect to a television
 signal, then one has the problem of applying the effect to
40 every frame of the signal, where there are thirty frames
 per second. Clearly, for even a very short sequence, the
 amount of work involved would be prohibitive.

SUBSTITUTE SHEET

Accordingly, it is desirable to provide a technique which enables a conventional colour or black and white image to be processed to achieve a variety of effects, principally giving an image a hand-drawn or painted appearance. Other more specialized effects can be provided, for example, an image can be rendered so that it appears to be a three-dimensional chrome surface. Ideally, one requires a method and apparatus that enables a variety of different techniques to be selected, manipulated and combined with one another to achieve an almost infinite variety of effects. It is further desirable that such an effect should be capable of being applied relatively quickly and economically to a digitized television or motion picture signal, or a digitized still picture or photograph.

Summary of the Present Invention

The present invention provides a number of different apparatus and methods, capable of applying a variety of different effects to a digitized signal of an image. These effects include: imparting a brush stroke to the image; strengthening the edge content of the image; adding an air brush effect to the image; imparting a reflective chrome appearance to the image; adding highlights to the image; transforming the image to resemble a line drawing; and imparting a water colour effect to the image.

Thus, in accordance with the present invention, there is provided an apparatus, for transforming a digitized signal of an image to give a brush stroke effect to the image, the apparatus comprising: a main input; a first rank value filter having an input for the original digitized signal, connected to the main input of the apparatus; a Laplacian unit having an input connected to an output of the rank value filter and an output; a gain unit with variable gain and connected to the output of the Laplacian unit; a summation unit having one input connected to an output of the gain unit and an output

forming an output of the apparatus; and a bypass line connected between the output of the first rank value filter and another input of the summation unit.

5 The present invention also encompasses an apparatus for incorporation two or more effects into a digitized signal of an image. The apparatus further includes a conditioning unit for generating a conditioning signal, and also an image composition unit. The image composition unit receives the outputs from the selected
10 apparatus and also the output from the conditioning unit. The composition unit then composes an output image by selective combination of the outputs of the various apparatus, in dependence upon the conditioning signal from the conditioning unit.

15 The present invention also provides methods corresponding to the apparatus.

Brief Description of the Drawings

For a better understanding of the present invention and to show more clearly how it may be carried
20 into effect, reference will now be made, by way of example, to the accompanying drawings in which:

Figures 1-8 show schematically a different apparatus as in accordance with the present invention;

25 Figure 9 shows an apparatus for carrying out the conditioning process in Figure 8; and

Figure 10 shows a schematic diagram of an apparatus capable of carrying out a number of different methods.

Description of the Preferred Embodiments

30 Before describing the individual techniques in detail, a description of individual elements or processes is provided. In the following discussion, the assumption is made that the image is a digital image. In the case of an image which is initially in analog form, this would
35 need to be processed to digitize it. Further, for the digitized image, this is considered to comprise a number

SUBSTITUTE SHEET

of pixels or individual points, which can be processed individually, as is known.

The notion used to identify the individual pixels in an image is to use an x-y coordinate system, x being the horizontal coordinate and y the vertical coordinate. Then, each pixel is denoted by $P(x,y)$, where x and y are the coordinates for that particular pixel. P denotes the intensity of the pixel. Clearly, for each pixel, in a colour image, there will be hue and saturation parameters as well.

There are a number of basic processes transformations that can be applied to the image. Thus, two images can be subjected to the basic arithmetic functions of addition, subtraction, multiplication or division, this being done on a pixel by pixel basis; eg each pixel of one image is added, subtracted etc. to the corresponding pixel of the second image, to produce a corresponding pixel in the final or output image. For example, one can simply add two images together as, by the equation $P_3(x,y) = P_1(x,y) + P_2(x,y)$ for all x,y.

A further technique is to simply multiply the intensity of each pixel by a constant gain, denoted G. Again, this is presented by an equation:

$$P_2(x,y) = GP_1(x,y) \text{ for all } x, y.$$

One conventional use of applying a gain to the pixels is to compensate for an image which has a predominance of low intensity pixels, i.e. the image has an overall dark appearance. If one draws a histogram of the frequency of occurrence against intensity, one gains an impression of the overall impression of the picture. If all the pixels are clustered towards the left hand end of the scale, i.e. indicating uniformly low intensity, then one can apply a certain gain to all the pixels to expand the range of intensity or grade levels to cover the entire range. Similarly, an excessively bright image will show a histogram with all the pixels clustered towards the upper end of the grade level or intensity scale. This can simply

SUBSTITUTE SHEET

be modified by applying a gain which is less than unity, to reduce the value of the intensity.

Image filtering is another standard technique which is employed by the present invention in combination with other standard techniques.

A mean filter or blur replaces the intensity of each pixel by an intensity derived by averaging or taking arithmetic mean value of the intensity of that pixel and its neighbours. This operation is repeated for each pixel in the image. The larger the area or number of pixels involved in the averaging process, the greater the blurring effect. This is sometimes referred to as a moving window average, since one is effectively looking at all the pixels within a certain window centred on a particular pixel.

By way of example, a 3x3 window blur would take the values of nine pixels in a square and then use this average value as the intensity for the centre pixel of that window.

For pixels at the edge of an image, as they are not totally surrounded by other pixels, allowance has to be made for this.

There is also known in the art a large variety of standard filters. These filters and other techniques mentioned above have conventionally been used to enhance pictures suffering from noise or distortion. Alternatively, in the field of robotics and industrial applications, image processing has been used with a view to aiding machine or automatic recognition of objects against a background.

In the present invention, rather than trying to eliminate distortion or noise, the inventors have realized that a variety of interesting and visually pleasing effects can be achieved by, in effect, deliberately introducing controlled distortion or noise. This give a desired visual effect in the final image. The invention makes use of four different digital classes, namely:

SUBSTITUTE SHEET

neighbourhood operations; point transformation operations; geometrical transformation; and colour space conversion.

5 A neighbourhood operation is the modification of pixel values in a digitized image based on the value of the pixel itself and the value of nearby pixels in a pre-defined neighbourhood or window. By performing a neighbourhood transformation on every pixel on an image, one can realize a number of different image filtering operations. Above, is given the example of simply taking
10 the arithmetic mean to achieve a blurring effect. This is a particular example of a two-dimensional convolution (sometimes referred to as a finite impulse response filter), which simply replaces a pixel value under consideration with a weighted average of the pixel and its
15 neighbours. The particular example given above took the same value for all the pixels in the window or neighbourhood, to give a low-pass filter which blurs the image. Different weights can be given to the pixels to achieve a high-pass filter which sharpens an image or a
20 band-pass filter which enhances or suppresses certain details in an image.

It should be appreciated that, for a typical video resolution image, there are 500 rows and 500 columns of pixels, giving 250,000 pixels. To take a nine-point
25 arithmetic means for each pixel and compute in 1/30 second, this being the time for each frame, is beyond the ability of current general purpose computers. In other words, it is not possible to carry this out in real time without special purpose apparatus.

30 An example of a Laplacian filter is given by equation:

$$P2(x,y) = 4P1(x,y) - P1(x-1,y) - P1(x+1,y) - P1(x,y-1) - P1(x,y+1)$$

for all x,y

35 It will be seen that if all the pixels in the neighbourhood have an equal value, this results in a transformation giving a zero value. However, if an edge or high intensity image detail is located in the centre of

SUBSTITUTE SHEET

- 7 -

the neighbourhood, the Laplacian operation will apply a high gain to this pixel value and emphasize this detail. The Laplacian filter overall has an effective image-sharpening or detail enhancement effect.

5 In the following description of preferred techniques, the designation "L" in a rectangle is used to denote a Laplacian filter.

 Another neighbourhood operation that is commonly used is a rank value filter. All the pixels in the
10 selected neighbourhood are ordered or ranked from smallest to largest in intensity. The centre pixel in the neighbourhood is then replaced with the pixel value that has a specified rank. A median rank filter replaces the
15 centre pixel with the pixel value that represents the middle or median rank. A maximum filter replaces the centre pixel with the maximum value in the neighbourhood, and a minimum filter operates accordingly. The maximum and minimum rank filters fall into a special sub-class called morphological, which have powerful geometric properties.
20 A maximum filter is often referred to as a dilation filter, as everything expands or swells; a minimum filter is often referred to as an erosion filter, as everything shrinks. These effects are incorporated into the methods of the present invention to achieve a variety of effects.

25 An interesting property of a median filter is that it removes or smooths details from the image that are smaller than the filter neighbourhood extend. It has been realized that this characteristic can be used to impart a brush-stroke impression onto an image by effectively
30 flattening detail inside a neighbourhood. By choosing various neighbourhood sizes and shapes, various paintbrush sizes and shapes can be simulated.

 In the following discussion of preferred techniques or methods, the designation "RVF" is used to
35 denote a two-dimensional rank value filter.

 Neighbourhood operations can also be used to implement edge detectors. An edge detector is one that

SUBSTITUTE SHEET

outputs a high value when there is a sharp change in image intensity and outputs a low value in areas of constant intensity. The output of an edge detector or edge map is useful for emphasizing or de-emphasizing the edge content in an image. Various techniques have been used which depend upon edge maps derived from edge detection. In other words, the filter neighbourhood size and shape changes based on the edge magnitude and direction. This enables a variety of effects to be achieved, that are totally driven by the image content.

In the following description of preferred techniques, the designation "E" is used to indicate an edge magnitude detector.

It will be appreciated that for all these various filters and detectors, one can use a neighbourhood of a variety of sizes and shapes. The larger the neighbourhood, the more dramatic the change in the output image with respect to its input. However, the larger the neighbourhood, the greater the amount of computation that is required for each pixel. It is now possible to obtain ASICs (Application Specific Integrated Circuits) from several companies which will implement a convolution in real time with up to an 8x8 pixel neighbourhood.

The contrast stretch outlined above is an example of a point transformation, which involves mapping a single pixel value to another, independently of other pixel values. Another example of point operation is thresholding. Here, pixels that exceed a pre-defined intensity threshold are mapped to a particular value, and those that for below the threshold are mapped to another value. This operation can effectively be used to divide an image into two components, often to separate a foreground object from its background. The process can be generalized to multiple thresholds.

Such thresholds can be used to effect a pseudo-colouring of the picture, which is carried out by

SUBSTITUTE SHEET

- 9 -

assigning individual colours to pre-defined intensity ranges.

5 This point transformation operation can enhance perception of certain details in an image. Since point transformations amount to a simple re-mapping of a pixel value, they can be realized with a look-up table (LUT) operation. LUT processors operating in real time are available from several companies.

10 Another type of image transformation is one that re-maps the locations of pixels in an image. An example of this would be to rotate an image through a given angle. The present invention uses several novel geometrical image manipulations which are called perturbation effects, since
15 location of a pixel is perturbed in some manner. By adding random noise to each pixel, one can achieve an airbrush or splatter paint effect, depending on the amplitude of noise added. It has further been realized that, by using shape from shading theory, one can turn an image into a reflective or refractive surface. In effect this technique
20 is used to model the image intensities as a three-dimensional surface.

A final category of image manipulation that is used by the present invention is colour space conversion. Most colour video images reside in the RGB (red, green,
25 blue) colour space, due to the limitation of phosphor colours. However, colour image processing is most conveniently carried out in the HSI (hue, saturation, intensity) colour space where the colour of a pixel may be decoupled from its intensity. Thus, a contrast stretch operation may be performed on the intensity component only
30 of an image without effecting the colour balance. Consequently, RGB to HSI and HSI to RGB conversions are commonly used in operations by the present invention. Further, one often requires a hard copy of an image that
35 has been processed in the video domain. The accomplish this, one must convert the RGB video image to the CMYK (cyan, magenta, yellow, key) colour space, that

SUBSTITUTE SHEET

corresponds to available inks in the printing industry. This is a non-trivial conversion if high quality results are required.

5 These effects can be achieved either in a software form or in real-time hardware. It is believed that at the present time there is hardware available that would enable circuit cards to be constructed incorporating image processing ASICS, to effect the methods of the present invention. These circuit cards would be controlled
10 from various industry standard computer buses.

Reference will now be made to Figures 1-9 which show examples of techniques or methods in accordance with the present invention.

15 In all these examples, where reference is made to specific kernel sizes, etc., this is to an image having a 512x512 pixel size.

Figure 1 shows an apparatus for effectively imparting a brush stroke texture to an image, the apparatus in Figure 1 being generally denoted by the
20 reference 1. The apparatus 1 includes an input 2 for the image, which is the input to a rank value filter 4.

The rank value filter 4 is in turn connected to a Laplacian filter 6 and then a variable gain unit 8. The gain unit 8 has its output connected through an addition
25 unit 10 to an output 12. Another input of the addition unit 10 is taken directly from the output of the rank value filter 4 through a bypass line as indicated at 14.

In use, a kernel or window size and shape is selected for the rank value filter 4 and this determines
30 the brush stroke size and shape. Thus, one can use a window that is elongate to achieve a brush stroke in a particular direction. The gain, G, set by the gain unit 8, sets the stroke boldness. If G is set to zero, the stroke will be muted. However as the gain G increases, the stroke
35 prominence increases.

By way of example, the rank value filter 4 can have a square kernel with each dimension of the kernel

SUBSTITUTE SHEET

varying from 1 - 15 pixels (with a median rank value). The gain unit 8 can provide a gain in the range 0 - 3. Zero gain gives a muted brush stroke, whereas a gain of 3 gives a bold brush stroke affect. The size of the kernel affects the brush stroke size and imparted. A more particularly preferred set of parameters would be a kernel size of 7 pixels square and a gain of 1.5.

For the rank value filter 4, a variety of kernel shapes could be used, for example square, rectangular, diagonal, cross and circular, depending upon the type of brush stroke required and the direction required for the brush stroke.

The rank value filter 4 removes or smooths details from the image that are smaller than the filter kernel extent, hence it is the kernel size that determines the effective brush stroke size. This local smoothing action tends to leave an imprint of the size and shape of the rank value filter kernel in the areas of the image where detail has been removed. If the kernel shape and size are chosen such that it is the shape and size of the desired brush stroke, the rank value filter output image will appear to have muted brush strokes imparted on it. A Laplacian filter is often employed to emphasize the image detail. Here, the Laplacian filter is employed to emphasize the boundaries of the imparted brush strokes, and depending upon the gain used, the brush stroke can range from muted to bold as the gain is increased.

Referring now to Figure 2, there is shown an apparatus generally indicated by the reference 20, which again has an input 22 and an output 24 which are connected through an addition or summation unit 26. The input 22 is additionally connected through an edge magnitude detector unit 28 and a variable gain unit 30, whose output is connected to another input of the addition unit 26.

Here, the gain unit 30 can be adjusted to provide either a positive or negative sign to the gain. The effect of the units 28, 30 is to add the detected

SUBSTITUTE SHEET

edges to the output image. If a positive sign is set by the gain unit 30, then the edges will be outlined in white, whereas if the unit 30 provides a negative sign then the edges will be outlined in black. The intensity of the outlining depends upon the gain set by the unit 30.

By way of example, a preferred arrangement of this second apparatus would have an edge magnitude detecting unit 28 which is a morphological edge detector (as disclosed in J. Serra, "Image Analysis Mathematical Morphology", Academic Press, New York, 1983). This edge detector has a square kernel with each side of the kernel having from 1 - 5 pixels, more preferably 3 pixels. The gain unit 30 can have a gain that varies in the range of 1 - 5 and preferably a gain of 3.5. The size of the kernel and the edge detector is directly proportional to the edge thickness in the pixels.

Other edge detectors that could equally be used as the edge magnitude detector number 28 are the Sobel Edge Detector, the Compass Gradient Edge Detector, the Laplacian Edge Detector, the Roberts Edge Detector, the Kirsch Operator, the Difference of Gaussians Edge Detector. It should be noted that a variety of other image edge enhancement filters could be used.

The edge magnitude detector unit 28 creates an image in which each pixel in image is proportional to the magnitude of any intensity changes near that pixel. Thus, areas where intensity changes abruptly have a high output in the edge detection image, and areas with little change in intensity have a low output in the edge detection image. This method strengthens the edge content of an image by adding or subtracting edges that have first been multiplied by a variable gain factor to or from the original input image. Adding the gain multiplied edges tends to make regions of the input image with high edge content to appear white, while subtracting the gain multiplied edges makes those regions appear black. Thus, the overall effect of this technique is to make areas in

the input image with a high edge content become outlined in white or black.

Referring now to Figure 3, this shows an apparatus generally denoted by the reference 32 which includes an input 34 and an output 36, for the input image denoted by $P_i(x,y)$ and $P_o(x,y)$ respectively. The processing is indicated within the box 38. This is given by the following equation:

$$P_o(x,y) = P_i(x + Gn_1(x,y), y + Gn_2(x,y)), \text{ for all } x,y$$

Where:

$n_1(x,y)$ and $n_2(x,y)$ are random numbers generated for each input image pixel; and G is a constant gain value.

Effectively, for each pixel given by the coordinates x,y , one generates two random numbers $n_1(x,y)$ and $n_2(x,y)$. Each of these random numbers is multiplied by a gain factor G and then added to the respective coordinate x or y . Thus, each of the output coordinates for x and y is the same as the input coordinate, plus the random number multiplied by the preset gain.

The effect of this is to scatter the pixels across the image, the degree of displacement of the pixels from their original positions being dependent upon the gain set. This gives an air brush effect with variable coarseness, the degree of coarseness being determined by the gain set.

A preferred random numbered generator is one which produces random numbers with a uniform probability density function in the range from 0 to 1. This is then preferably combined with a gain of 2 to give a mild splattering dislocation of the pixels. A gain of, for example, 20 gives a very dislocated and hazy splattering of a pixel, while gains of greater than 20 tend to produce images that are unrecognizable.

Other probability density functions from a random numbered generator may be used with equal success. The texture of the dislocated pixels would change as the density function changes. For example, a normal

probability density function with zero mean and unity variance could be used and the result would be a somewhat less coarse pixel dislocation for the same gain factor. Log-normal exponential, poisson and other probability density functions could also be used to give a good effect.

Turning to Figure 4, there is shown an apparatus for providing a chrome surface effect. Here, the apparatus is generally denoted by the reference 40. Again, the apparatus is shown as a single unit having an input 42 for an image, P_i , to be processed and a second input 44 for an image, P_R , that is to be reflected into the output image. An output is indicated at 46. The equations indicating the processing occurring in the apparatus 40 are as follows:

$$\begin{aligned} & \text{Where: } P_O(x,y) = P_R(X_T, Y_T) \text{ for all } x,y \\ & X_T = \begin{cases} x; P_i(x,y) - P_i(x-a,y) = 0 \\ \frac{x_m}{\pi} \arctan \left(\frac{a}{P_i(x,y) - P_i(x-a,y)} \right) & ; \text{ otherwise} \end{cases} \\ & Y_T = \begin{cases} y; P_i(x,y) - P_i(x,y-b) = 0 \\ \frac{y_m}{\pi} \arctan \left(\frac{b}{P_i(x,y) - P_i(x,y-b)} \right) & ; \text{ otherwise} \end{cases} \end{aligned}$$

Where: a, b are constants setting the surface smoothness, and where x_m and y_m represent the maximum extent of the digitized input images in the x and y directions respectively.

In effect, the process here is reflecting the image, P_R , in the input image, P_i , and thus is treating the input image as a reflective or mirrored surface. Further, the intensity of each pixel in the input image, P_i , is treated as the height above an arbitrary flat surface, so as to give a three dimensional effect, two dimensions being the x and y coordinates and the third dimension being the pixel intensity.

Thus the method starts by converting the input image, P_i , into a three dimensional surface. It then assumes that this is reflective and effectively takes the reflection of the image, P_R , in this reflective surface. In order to be able to "see" the shape of a complex reflective surface, one has to have some image that is reflected in it. It is for this reason that the image P_R is provided. The image P_R can be any suitable image, and can be selected to give a desired appearance.

It should be appreciated that if the input image, P_i is simply a flat surface, i.e. a conventional plain mirror, then one would obtain a pure reflection of the image to be reflected, P_R . Where the input image P_i is a complex shape, e.g. a person's head, then the reflective surface is extremely complex and, resulting in considerable distortion of the image to be reflected, P_R , so that this is often unrecognizable. Even if the reflected image P_R becomes totally distorted and unrecognizable the output image still retains the shape or appearance of the input image P_i , but with a simulated, reflective or chrome finish.

The equations given above effectively intend to simulate, in a simplistic way, this process. These are discussed below for the x coordinate, it being appreciated that the y coordinate is calculated in an exactly corresponding manner.

For the x coordinate when the condition $P_i(x,y)$ minus $P_i(x-a,y) = 0$, one has a flat reflective surface, at least locally. Hence, a point on the image to be reflected, P_R is reflected back from the flat surface to exactly the same point. For this reason, X_i is simply set equal to x. However, where this condition is not met, i.e. the surface is not locally flat, consequently, the local surface of the image P_i will point to an alternate location on the image to be reflected P_R . The arctan function is simply a calculation as to the point in the image P_R that the locally inclined surface of the image P_i indicates.

SUBSTITUTE SHEET

It is appreciated that these calculations are optically simplistic, and do not take into account the complex effects one obtains from complex curved surfaces. Nonetheless, it has been found that the overall effect is to give a very effective simulation of a chrome surface, which produces a realistic three-dimensional effect, representative of the original input image P_i . The input image P_i then appears to have been coated with reflective or chrome finish.

Whilst a variety of different constants can be used, it has been found that a useful range for the smoothing constants a, b is 1-15, with a value of 1 creating a reflective surface that is most sensitive to the undulating surfaced of P_i and the value of 15 being much less sensitive than the local variations in P_i .

As an example of the image that can be used for the image to be reflected, P_R , one can choose a ramp image represented by the formula $P_R(x, y) = y$ for all x, y . This is a ramp which increases from zero at $y = 0$ to a maximum value for the maximum value y . It will be appreciated that the ramp can be arranged to incline in any direction. In effect, the intensity of the image to be reflected, P_R , varies as the shape given by the ramp.

The result of using such an image for the image to be reflected, P_R , is to give a 3-D bas relief effect of the input image, P_i . This results because when P_R is chosen as a uniformly changing ramp image, it varies from dark to light across its surface. This models a uniformly changing light source that is reflected into the reflective surface of the input image P_i , which tends to light the three dimensional surface model of the input image in a way that gives it a three dimensional relief image. In other words, the lighting gives depth as seen by a viewer.

Referring now to Figure 5, there is shown a fifth apparatus generally denoted by the reference 50. The apparatus 50 has an input 52 for an input image which is divided into two branches, one branch 53 connected

SUBSTITUTE SHEET

directly to a combination unit 58 and another branch 54 connected to a contrast stretch unit 56. The output of the contrast stretch unit 56 is also connected to an input of the combination unit 58. The combination unit 58 has an output 59.

The unit 56 performs a contrast stretch operation which is given by the following equation:

$$P_2 = \begin{cases} (x,y)0; & P_1(x,y) \leq \text{INTENSITY}_2 \\ \text{MAX-VAL}; & P_1(x,y) \geq \text{INTENSITY}_1 \\ \frac{\text{MAX-VAL} (P_1(x,y) - \text{INTENSITY}_2)}{\text{INTENSITY}_1 - \text{INTENSITY}_2}; & \text{otherwise} \end{cases}$$

for all x, y .

and MAX-VAL is the maximum allowable pixel value in the input image; INTENSITY₁, INTENSITY₂ are selected image grey levels with INTENSITY₁, INTENSITY₂.

The function given by the above equation essentially sets the output, $P_2(x, y)$, by three separate calculations, depending upon the value of the input signal, $P_1(x, y)$. If P_1 is less than INTENSITY₂, then the output P_2 is set to zero. If P_1 is between INTENSITY₂ and INTENSITY₁, then P_2 is determined by the equation above which essentially gives a straight line slope from zero to the maximum value as P_1 increases from INTENSITY₂ to INTENSITY₁. Where P_1 is greater than INTENSITY₁, then the output is set to the maximum value.

The effect of this is to stretch a middle range of grey levels, and eliminate the upper and lower grey levels from the input signal by setting them to zero or the maximum value respectively. If one considered a histogram of the distribution of the pixel intensities against the grey level or intensity, one would find that the middle portion of the histogram had effectively been

taken and stretched to cover the whole scale, whilst the outer portions of the original histogram had effectively moved to the very edges.

The combining function performed by the combination unit 58 can be given by either one of the following equations:

$$P_3(x,y) = P_1(x,y) + P_2(x,y) ; \text{ for all } x,y$$

or

$$P_3(x,y) = \frac{P_1(x,y) + P_2(x,y)}{2} ; \text{ for all } x,y$$

10

2

The first of these equations is a simple summation, and will effectively give an increase in the overall intensity. The second of these equations represents an averaging effect.

15 The overall effect of this technique is to add highlights to an image. The values selected for INTENSITY₁ and INTENSITY₂ set the highlight brightness and extent.

An alternative way of considering Figure 5 would be to provide two variable gain units in the two branches, and then a simple summation unit at 58. If the gains of the two units are set equal to one another and some arbitrary constant, then the two branches are effectively added, as well as being multiplied by the arbitrary constant. If the two gains are set equal and equal to one-half, then one effectively obtains an average of the two branches. Thus, by providing two gain units one obtains a more general combination of the original image and the contrast stretched image.

With regard to preferred operating parameters for this Figure 5 embodiment, for a well exposed video resolution image, INTENSITY₁ and INTENSITY₂ could be chosen as the sixtieth percentile grey level in the input image and the ninety-fifth percentile grey level in the input image respectively. This percentile selection adds robustness to a varying lighting condition. This effectively adds or averages the pixel intensities between the sixtieth and ninety-fifth intensity percentiles to the input image. This range of intensities between these two

SUBSTITUTE SHEET

percentiles is deemed to be the highlights of the input image.

If the highlights are averaged with the input image, the highlights are incorporated into the image in the locations that they are present in the original input image; however, in areas of image where there are no highlights present, the addition of highlights has no affect. Where the averaging technique is used, the areas with highlights are still highlighted, but to a slightly lesser extent, whereas the areas with no highlights are effectively decreased in intensity. This has the effect of making the highlights more pronounced. Averaging the highlights into the image makes the output image appear as if the highlights were added using chalk.

Referring to Figure 6, there is shown an apparatus, intended to transform an input image into a line drawing. The apparatus, here denoted 60, has an input 62 connected to first and second mean filters 63, 64. The output of the mean filters are connected to positive and negative inputs of a summation unit 66, which has an output 68 forming the output of the apparatus. Here, the first mean filter 63 has a kernel $m \times n$, whilst the second mean filter has a kernel $u \times v$. The kernel of the first mean filter 63 is greater than that of the second mean filter 64; in other words, m is greater than u and n is greater than v .

The output at 68 is given by the following equation:

$$\begin{aligned}
 P_o(x,y) = & \frac{\sum_{i=-m/2}^{m/2} \sum_{j=-n/2}^{n/2} P_i(x-i,y-j)}{mn} \\
 & - \frac{\sum_{k=-u/2}^{u/2} \sum_{l=-v/2}^{v/2} P_i(x-k,y-l)}{uv} ; \text{ for all } x,y
 \end{aligned}$$

SUBSTITUTE SHEET

The effect of this arrangement is, for each pixel, to first take a mean within a first kernel of all the pixels in that kernel, and then subtract a mean signal derived from the second, smaller kernel, to arrive at an output signal.

Each mean filter 63, 64, performs a low-pass function. The cut-off frequency of each mean filter is determined by the size of the kernel, so that the filter with a smaller kernel has a higher cut off frequency. By subtracting the output of one filter from the other, one obtains a band-pass filter. Normally, edge information occupies the higher frequency regions of an image, i.e. sharp transitions. However, image noise also tends to reside at the higher frequencies. Thus, if one uses a band-pass filter, one can pass some of the high frequencies through to extract the image edges for forming a line drawing, but simultaneously attenuate the highest frequencies that contain noise and make for a dirtier or noisier line drawing image.

Here, it will be appreciated that, because of the relative sizes of the two kernels, one is in fact subtracting the output from the mean filter with the higher cut-off frequency, namely filter 64 from the output of the other mean filter with the lower cut-off frequency, namely, filter 63. In effect, this gives a negative band pass filter operation.

The result is that the small features in an image, normally associated with higher frequencies, such as a human tooth or iris of the pupil are outlined; a conventional band-pass filter would cause them to appear to be filled in. Here, it is to be noted that if the negative band-pass filter gives an output indicating a negative value for the intensity then this is treated as zero.

It has been found that useful ranges for the sizes of the two kernels are the range 1 - 13 for the parameters u, v and the range 3 - 15 for the parameters m,

n. The more particularly preferred values are for u and v to be both equal to 7 and m and n to be both equal to 11.

Figure 7 shows an apparatus for modifying an image so that it appears to be painted in a water colour style. In particular, rounded blobby features reminiscent of, or simulating, paint dabs are added to the image.

The apparatus 70 of Figure 7 has an input 72 connected to an input of a first rank value filter 74, which in turn has an output connected to a second rank value filter 76.

The output of the second rank value filter 76 is connected, as in the first arrangement of Figure 1, through a Laplacian unit 78 and a gain unit 80 to a summation unit 82. There is also a bypass line 84 providing a direct connection from the output of the filter 76 to the summation unit 82. The summation unit 82 sums its two inputs and forms an output 86.

The two rank value filters 74, 76 have identical kernel size and shape, but the rank value for each filter is chosen differently, in accordance with the following method.

Let a rank value of 1 with respect to a kernel correspond to the minimum pixel value in the kernel and a rank value of N correspond to the maximum pixel values in the kernel. Choose a value of p such that: $1 \leq p \leq N$

Then the rank for the filters 74, 76 are selected as:

RVF Filter 74: p

RVF Filter 76: $(N + 1) - p$

Thus in effect, p is chosen arbitrarily and the sum of the two ranks for the two rank value filters is equal to the sum of the maximum and minimum rank value in the kernel. When p is halfway between one and N, then the rank for each filter will be similar. The bright areas of the image do not then move relative to the dark areas of the image. However, as p is decreased toward one, then the

first rank value filter will have the low rank p , whilst the second rank value filter 76 will have a relatively high rank. This has the effect of the dark areas of the image expanding more into the light regions. Correspondingly, as p is increased towards N , the light regions of the image expand more into the dark regions.

The combination of the two rank value filters produces the rounded blobby areas. The units 78-84 accentuates the paint dabs. A low gain, e.g. close to zero, produces a muted blob, whilst a higher gain produces a stronger dab. It is to be noted that components 78-84 correspond to the arrangement shown in Figure 1.

It is to be noted that if $p = 1$, then the first rank value filter 74 is a local minimum filter or morphological erosion operator, i.e. it causes bright areas of the image to contract and dark areas to expand, and the second rank value filter 76 is then a local maximum filter or dilation operator, i.e. bright areas of the image expand while dark areas contract. The combination of the two filters operating as erosion and dilation operators performs an operation referred to as a morphological opening. The net effect of an opening is that local peaks in the image smaller than the kernel extent are smoothed from the image and the dark areas of the image seep into the bright areas, since the dilation does not quite counter-act the initial erosion. The combination of this local peak smoothing and dark regions swelling produces round blobby areas in the image reminiscent of water colour paint dabs.

Correspondingly, if $p = N$, the roles of the two rank value filters are reversed. The first rank value filter 74 becomes a maximum filter, whilst the second rank value filter 76 becomes a local minimum filter. The combination of the two filters working in series then performs a morphological closing. The net effect of such a closing is the local valleys in the image, i.e. dark areas which are smaller than the kernel extent, are filled

SUBSTITUTE SHEET

in and the bright areas of the image seep into the dark areas. Here, the erosion does not quite counteract the initial dilation. Again, in the combination of valley filling and light region swelling produces blobby areas
 5 reminiscent of water colour dabs.

If p is adjusted to be in the mid-point between 1 and N , there is less movement of the dark regions into the light and vice versa. As well, the overall effect of the blob area creation diminishes as p approaches the mid-point,
 10 since full erosions and dilations are no longer being performed. The two rank value filters become median filters that preserve intensity boundary locations, thus, when p is located in the mid-point of the range, the water colour effect becomes more subtle.

15 The role of the Laplacian filter 78 and gain unit 80 is to strengthen the paint dab boundaries. The higher the gain the more pronounced the boundary.

The preferred parameters for this method are:

20 $p = 20$
 $N = 25$
 $G = 1.0$

However, useful ranges for these parameters are:

$1 \leq p \leq N/5$
 or $(N-N/5) \leq p \leq N$
 25 N in the range 9 - 121
 G in the range 0 - 3

Turning to Figure 8, there is shown a method and apparatus for combining different effects together. Here,
 30 the apparatus 70 has an input 72 connected to first and second processes indicated at 74, 76 and to a conditioning unit 78. The outputs of these three units 74, 76 and 78 are connected to an image composition unit 80 which produces an output 82.

35 The processes 74, 76 can be any one of the processes in accordance with the present invention, e.g. those described in relation to the preceding figures. This apparatus enables them to be combined in a variety of

ways. The conditioning unit 78 provides a switching function to combine the two modified images produced from the processes 74, 76 as desired.

5 The conditioning unit 78 can produce the following function at the output 82:

Where:
$$D(x,y) = \frac{C(x,y)A(x,y) + (MAX\ VAL - C(x,y)) B(x,y)}{MAX\ VAL}$$

MAX VAL is the maximum allowable pixel intensity value.

10 In effect, this function provides that the respective weights given to the two processes A, B, depends upon the intensity of the conditioning signal, C, for that particular pixel.

15 It is expected that useful conditioning functions for the conditioning unit 78 are: no conditioning performed; edge magnitude detection; and contrast stretching. Other conditioning techniques are possible. Thus, one can detect different areas of an image in relation to colour and/or intensity or other factors. 20 Then, these different areas can be subjected to different processes. Also, whilst just two processes 74, 76 are shown, it will be realized that this basic arrangement can be generalized to any number of processes.

25 Another possibility is to combine images dependent upon the brightness, i.e. in the bright areas one processing technique is used, whereas in the dark areas another technique is used. In this case, the input image itself may serve as the switching function. However, 30 one may wish to condition the input image in some way to change the reaction of the switching function. For instance, an edge magnitude detector could be employed to create image C. This has the effect of having image A dominate the output image and areas of high edge intensity and image B in regions of low edge intensity. 35 Alternatively, the input image could have its intensity profile modified in some way such as a contrast stretch in order to modify the switching function.

Referring now to Figure 9, there is shown an example of one conditioning process that could be used. Here, the conditioning unit 98 has an input 104 which is connected to the inputs of a rank value filter 106 and a mean filter 108. The outputs of these two filters 106, 108 are connected to a combination unit 110 which has positive and negative inputs for the two filters, 106, 108 respectively. The output of the unit 110 is connected to the threshold unit 112, and in turn to an output 114.

The rank value filter 106 has a rank value of 25, i.e. a median value. The thresholding unit 112 provides thresholding process where every pixel intensity greater than the threshold t is mapped to MAX VAL. Any pixel having an intensity less than t is mapped to zero. Here, t is set equal to 1.

With this conditioning process, the output of 114 will be set equal to MAX VAL, where the local median value is greater than or equal to the local mean value. On the other hand, where the median value is less than the mean value, the output 114 will be zero.

Using the equation for the output $D(x,y)$, for Figure 8, then the output will be process 1, where the local median value is greater than or equal to the local mean value. On the other hand, where the median value is less than the mean value, then process 2 will be passed through to the output.

The effect of this switching function is to produce a strong painted effect.

The two filters 106, 108 preferably have a kernel size of 7×7 .

Reference will now be made to Figure 10, which shows a block diagram for a real-time digital video effect process, indicated by the reference 120. The process of 120 has an analog to digital converter 122 with an input for a video signal. This produces two outputs, 123, 124 for the RGB and HSI colour spaces.

A switch 126 enables either or both of these outputs 123, 124 to be connected through to two separate branches 128 and 130.

5 In the first branch 128, there is an rank value filter 132, connected to a convolution filter 134, and then in turn to a lookup table 136.

In the second branch 130, there is an edge detection unit 138, another lookup table 140 and an arithmetic logic unit 142.

10 As indicated at 144 the various components 132-142 would be mounted in a common housing and connected, as indicated by terminals 146, to one or more digital crosspoint switches. These digital crosspoint switches would enable the components 132-142 to be connected in a
15 variety of patterns. The input switch 126 and output 148 are similarly provided with terminals 146 to enable them to be connected by the digital crosspoint switches.

In Figure 10, arrows 150 indicate, schematically, the digital crosspoint switch or switches
20 and their effective connections.

Thus, here the input signal passes through the first branch 128 where the signal is given a brush stroke effect by the rank value filter 132 and then sharpened in the convolution filter 138 prior to a contrast stretch
25 operation by the lookup table 136. Simultaneously, in the other branch, the convolution filter 138 detects edges, and the magnitude of the edges and then normalized by the lookup table 140.

The arithmetical logic unit 142 subtracts the
30 output of the two lookup tables 136, 140, so as to subtract the normalized edges from the image from the first branch 128. The edges in the resulting image will now have dark outline highlights.

The output 148 is then connected by a switch 152
35 to the RGB or HSI input of a digital to analog converter 154, and then to a final output 156.

SUBSTITUTE SHEET

We claim:

1. An apparatus, for transforming a digitized signal of an image to give a brush stroke effect, the apparatus comprising: a main input; a first rank value
5 filter having an input for an original digitized signal, connected to the main input of the apparatus; a Laplacian unit having an input connected to an output of the rank value filter and an output; a gain unit with variable gain and connected to the output of the Laplacian unit; a
10 summation unit having one input connected to an output of the gain unit and an output forming an output of the apparatus; and a bypass line connected between the output of the first rank value filter and another input of the summation unit.
- 15 2. An apparatus for strengthening the edge content of a digitized signal of an image, the apparatus comprising: a main input for the digitized video signal; an edge magnitude detector connected to that main input; a gain unit having an input connected to an output of the
20 edge magnitude detector unit and an output; and a summation unit having an input connected to the output of the gain unit and an input connected to the main input, and an output for a transformed digitized signal, whereby the gain unit can be adjusted to adjust the amount of the
25 image edges detected by the edge magnitude detector unit which are combined with the original image.
3. An apparatus for adding an airbrush effect to a digitized signal of an image, the apparatus comprising:
30 means for generating, for each pixel, first and second random numbers corresponding to the first and second coordinates for that pixel, and summation means for adding, for each pixel, the two corresponding random numbers to the two corresponding coordinates respectively, to produce output coordinates, whereby the pixels of the
35 original image are scattered randomly in the output image in dependence upon the random numbers generated.

4. An apparatus as claimed in claim 3, which additionally includes means for generating a constant gain, which can be varied by a user, and means for multiplying the random numbers for each pixel by the gain value from the constant gain means, whereby adjustment of the gain value enables the degree of scattering of the pixels to be varied.

5. An apparatus, for transforming an input digitized signal of an image comprising a plurality of pixels to give the appearance of a reflective chrome surface, the apparatus comprising: an input for an original digitized signal of an input image; an input for a reflected digitized signal of an image to be reflected in the input image; means for generating smoothness constants for the two coordinates of the pixels representative of the surface smoothness; means for generating image extent constants representative of the image extent of the pixels in the two coordinate directions; means for checking, for each coordinate of each pixel, whether a first intensity, being the intensity of the respective pixel of the input image, is the same as the second intensity of another pixel of the input image spaced along the respective coordinate by the respective coordinate smoothness constant; setting means for setting, for each coordinate of each pixel, the respective coordinate equal to the coordinate of the input image when said checking means determines that the first and second intensities are the same, and otherwise, for setting the coordinate equal to the coordinate image extent constant divided by π and multiplied by the arc tangent of the respective coordinate smoothness constant divided by the difference between the first intensity minus the second intensity; and means for determining, for each pixel, the intensity in a transformed output image by taking the intensity of a corresponding pixel in the reflected digitized signal determined by the coordinates set by said setting means.

SUBSTITUTE SHEET

6. An apparatus, for adding highlights to a digitized signal of an image, the apparatus comprising a main input connected to a contrast stretch unit, in which first and second intensities can be set by the user and in which the intensity for each pixel is set equal to zero if the input intensity is less than the second intensity, is set equal to the maximum value of the intensity in the input image, if the input intensity is greater than the first intensity, and otherwise is determined by multiplying the maximum value of the intensity in the original input image by the difference between the input intensity of that pixel and the second intensity, and dividing by the difference between the first and second intensities, the first intensity being greater than the second intensity; and a combination unit which has an input connected to the main input and another input connected to an output of the contrast stretch unit, whereby the contrast stretched image is combined with the original image to give an output at an output of the combination unit.

7. An apparatus as claimed in claim 6, wherein the combination unit, for each pixel, after summing the two units, divides the resultant value by two to obtain an average intensity from the two input signals, which forms the output.

8. An apparatus for transforming a digitized signal of an image to resemble a line drawing, the apparatus comprising a main input; a first mean filter connected to the main input and having an output and defining a first kernel; and a second mean filter having an input connected to the main input and an output and defining a second kernel, the second kernel having dimensions in both coordinate directions less than the dimensions of the first kernel; and a summation unit for forming, for each pixel, the difference between the mean value determined by the first mean filter and the mean value determined by the

second mean filter, and having an output forming the output of the apparatus.

9. An apparatus as claimed in claim 8, wherein, the summation unit subtracts the output of the second filter from the first filter.

10. An apparatus as claimed in claim 1, which is adapted for imparting a water colour effect to the digitized signal, and which further comprises: a second rank value filter having an input connected to the main input of the apparatus and an output which is connected to the input of the first rank value filter, and wherein the rank value filters have kernels of the same size and shape, wherein the rank of the first rank value filter is chosen to lie between the maximum and minimum value of the pixels in the kernel, and wherein the rank of the second rank value filter unit is set equal to the sum of the minimum and maximum pixel values in the kernel, minus the rank of the first rank value filter, whereby adjustment of the rank of the first rank value filter and hence of the rank of the second rank value filter varies the relative sizes of the bright and dark areas in the image.

11. An apparatus for incorporating two or more effects into a digitized signal of an image, the apparatus comprising two or more apparatus as claimed in claims 1, 2, 3, 5, 6, 8 and 10; a conditioning unit for generating a conditioning signal and having an input, the input digitized signal being connected to the input of the conditioning unit and the inputs of the selected apparatuses; and an image composition unit having inputs connected to the outputs of the selected apparatus and an output of the conditioning unit, the image composition unit composing an output image by selective combination of the outputs of the selected apparatuses as determined by the conditioning signal.

12. A method of transforming a digitized signal of an image to give a brush stroke effect, the method comprising, in the following order, the following steps:

SUBSTITUTE SHEET

(i) passing the signal through a rank value filter to filter the intensities of the pixels, to produce a rank value filtered signal;

5 (ii) passing the signal through a Laplacian unit and subsequently applying a preset gain to the signal; and

(iii) adding the rank value filtered signal from step (i) to the signal produced by step (ii) to produce an output signal.

10 13. A method for strengthening the edge content of a digitized signal of an image, the method comprising, in the following order, the following steps:

(i) detecting edges of the signal to produce an edge signal having an intensity indicative of the edges in the original image;

15 (ii) multiplying the edge signal by a pre-set gain; and

(iii) adding the gain multiplied edge signal of step (ii) to the original signal to produce an output signal.

20 14. A method of adding an airbrush effect to a digitized signal of an image, the method comprising, in the following order, the following steps:

25 (i) for each pixel generating first and second random numbers corresponding to the first and second coordinates for that pixel;

(ii) for each coordinate of each pixel, adding the respective random number to that coordinate to produce an output coordinate, whereby the pixels of the original image are scattered randomly in an output image in dependence upon the random numbers generated.

30 15. A method as claimed in claim 14, wherein step (i) includes the additional step of multiplying each random number by a preset gain, whereby varying the gain varies the degree of scattering of the pixels in the image.

35 16. A method for transforming an input digitized signal of an input image to give the appearance of a

reflective chrome surface, the method comprising, in the following order, the following steps:

- 5 (i) generating smoothness constants for the two coordinates of each pixel representative of the surface smoothness;
 - (ii) generating image extent constants representative of the image extent of the pixels in the two coordinate directions;
 - 10 (iii) providing a reflected digitized signal of an image to be reflected in the surface of the input image;
 - (iv) for each coordinate of each pixel, checking whether a first intensity, which is the intensity of the respective pixel in the input image, is the same as the
15 second intensity of another pixel of the input image spaced along the respective coordinate by the respective coordinate smoothness constant;
 - (v) for each coordinate of each pixel, setting the coordinate equal to the coordinate of the input image
20 when step (iv) determines that the first and second intensities are the same, and otherwise setting the coordinate of each pixel equal to the respective coordinate image extent constant divided by π and multiplied by the arc tangent of the respective coordinate
25 smoothness constant divided by the difference between the first intensity minus the second intensity.
 - (vi) determining, for each pixel, the intensity in a transformed output image by taking the intensity of a corresponding pixel in the reflected digitized signal
30 determined by the coordinates calculated in steps (iv) and (v).
17. A method for adding highlights to a digitized signal of an image, the method comprising, in the following order, the following steps:
- 35 (i) setting first and second intensities, the first intensity being greater than the second intensity,

SUBSTITUTE SHEET

and both the first and second intensities being less than the maximum of the intensity in the input image;

5 (ii) for each pixel, setting the intensity of the pixel equal to zero if the input intensity is less than the first intensity, setting the intensity in the original input image if the input intensity is greater than the first intensity, and otherwise multiplying the maximum value of the intensity of the original input image by the difference between the input intensity of that pixel and the second intensity and dividing by the difference between the first and second intensities, to obtain a contrast stretched digitized signal; and

10 (iii) adding the contrast stretched digitized signal to the original signal to produce an output signal.

15 18. A method as claimed in claim 17, wherein, after adding the contrast stretched signal to the original signal, the sum of those two signals is divided by two to produce the output signal.

19. A method for transforming a digitized signal of an image to resemble a line drawing, the method comprising, in the following order, the steps of:

(i) filtering an input signal through a first mean filter having a first kernel size;

25 (ii) filtering the input signal through a second mean filter having a second kernel size, the second kernel size having dimensions, in both coordinate directions, less than the dimensions of the first kernel; and


(iii) for each pixel, subtracting the output of the second filter from the output of the first filter to determine an output intensity for that pixel.

30 20. A method as claimed in claim 12, which is adapted for imparting a water colour effect to the signal, and which further comprises the steps of:




(i) between steps (i) and (ii) filtering the video signal through a second rank value filter having a kernel of the same size and shape as the rank value filtering of step (i), wherein the rank of the rank value



35

- of step (i) is chosen to lie between the maximum and minimum values of the pixels in the kernel, and wherein the rank of the second rank value filter is set equal to the sum of the minimum and maximum pixel values in the kernel, minus the rank of the first rank value filter, whereby adjustment of the rank of the first rank value filter and hence the rank of the second rank value filter varies the relative sizes of the bright and dark areas in the image.
- 5 21. A method for incorporating two or more effects into a digitized signal, the method comprising selecting two or more methods from the methods as claimed in claim 12, 13, 14, 16, 17, 19 and 20, and carrying out the following additional steps:
- 10 (i) generating a conditioning signal from the input signal;
- 15 (ii) composing an output signal by selection from the outputs of the selected methods, in dependence upon the conditioning signal.


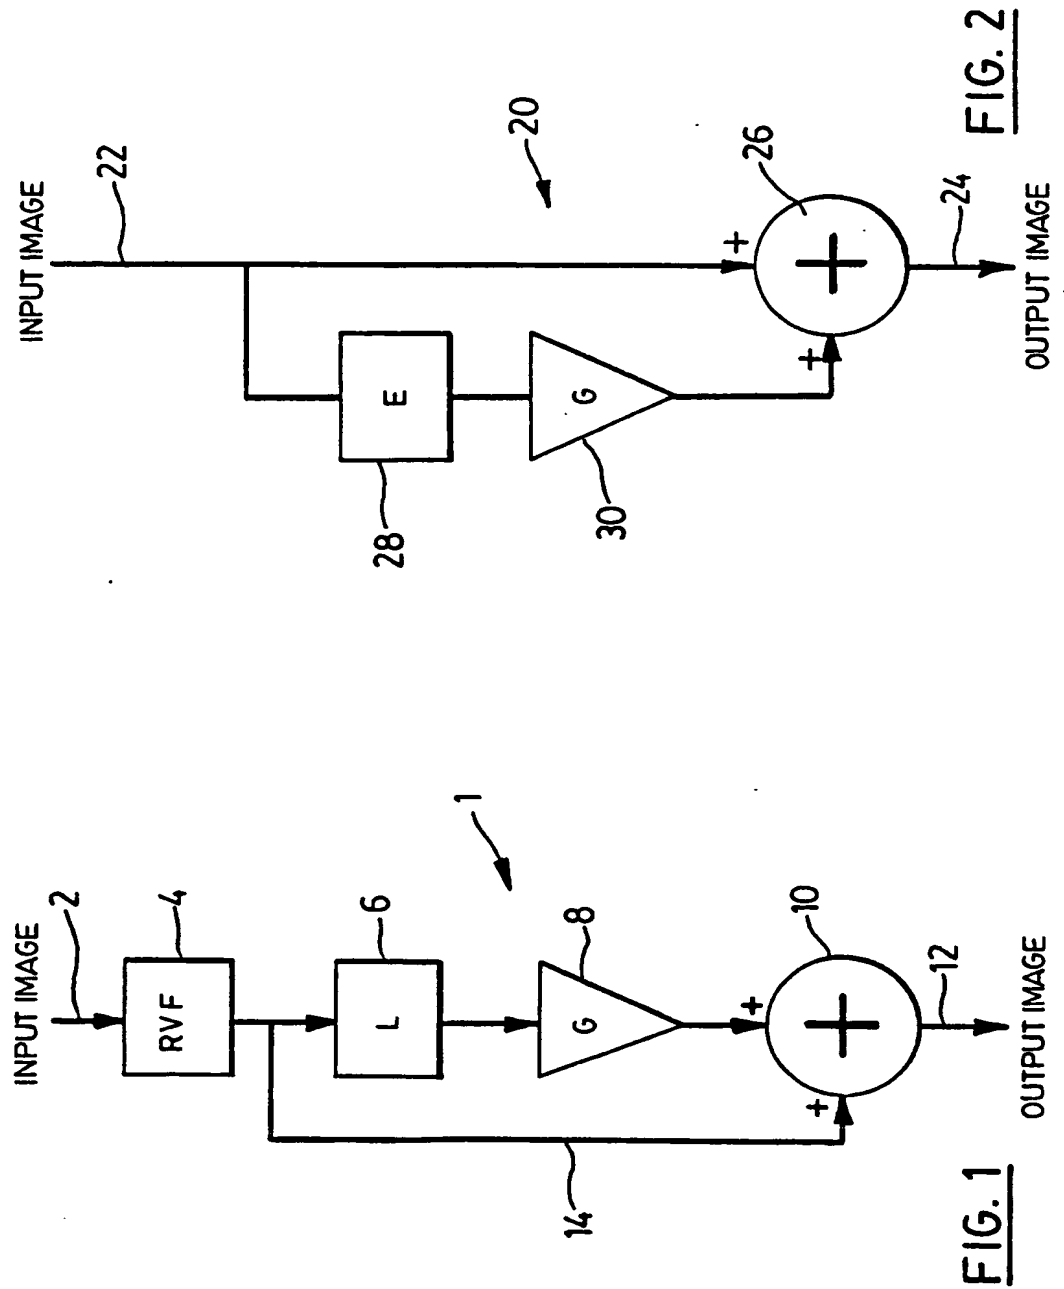


2/5

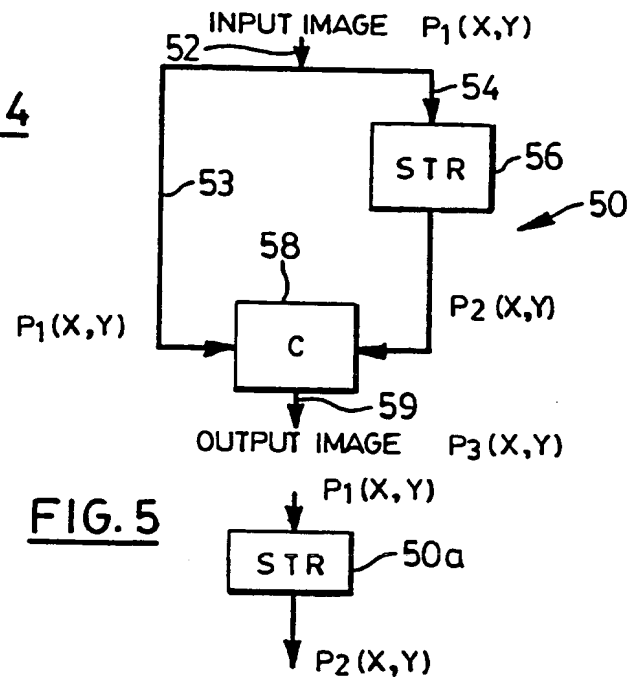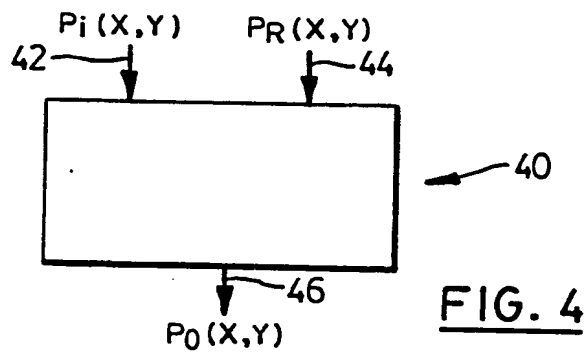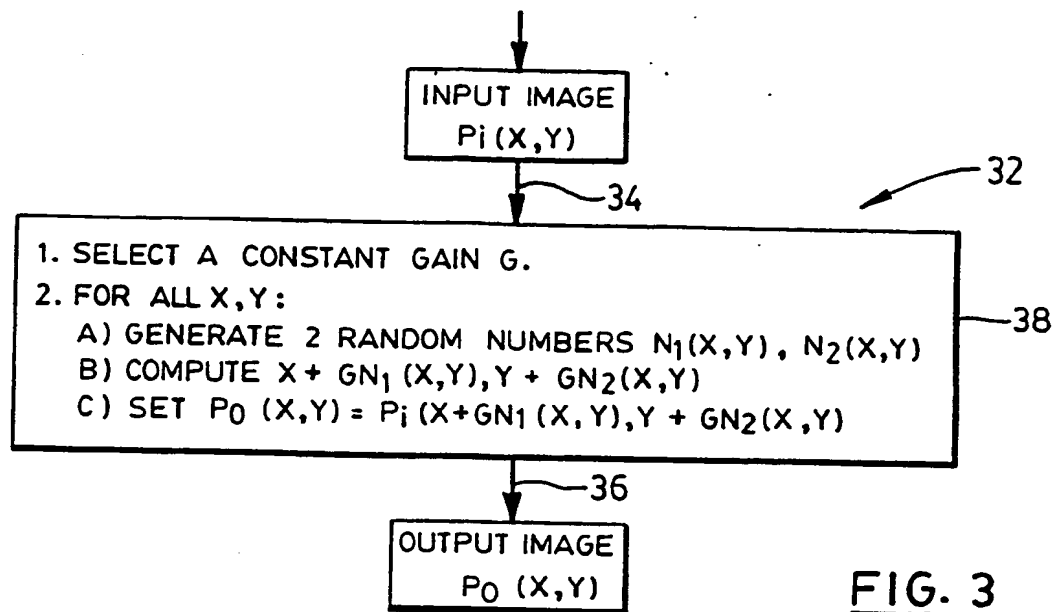

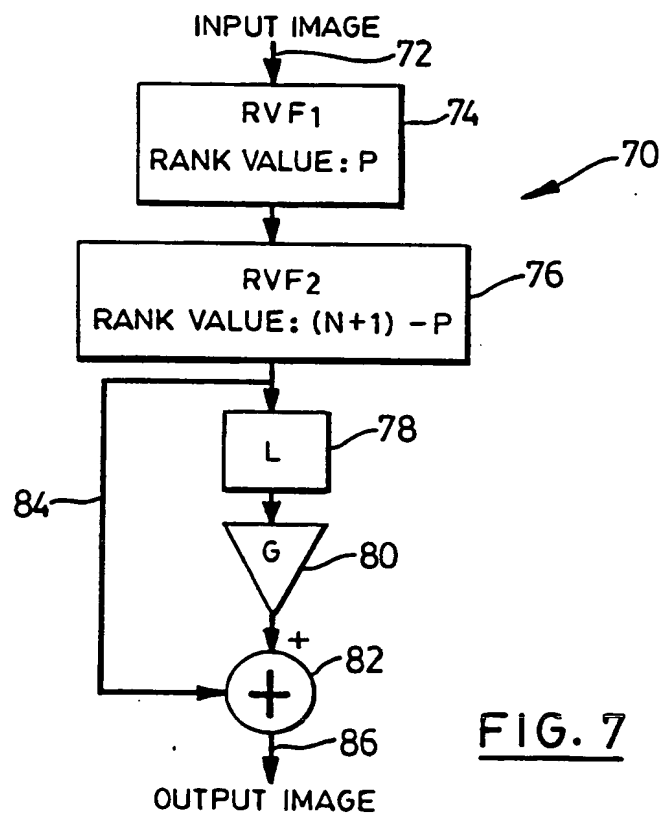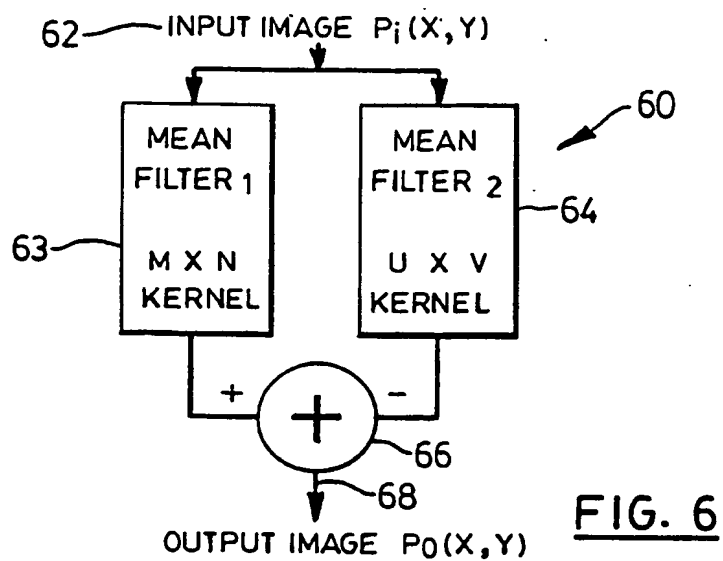

4/5

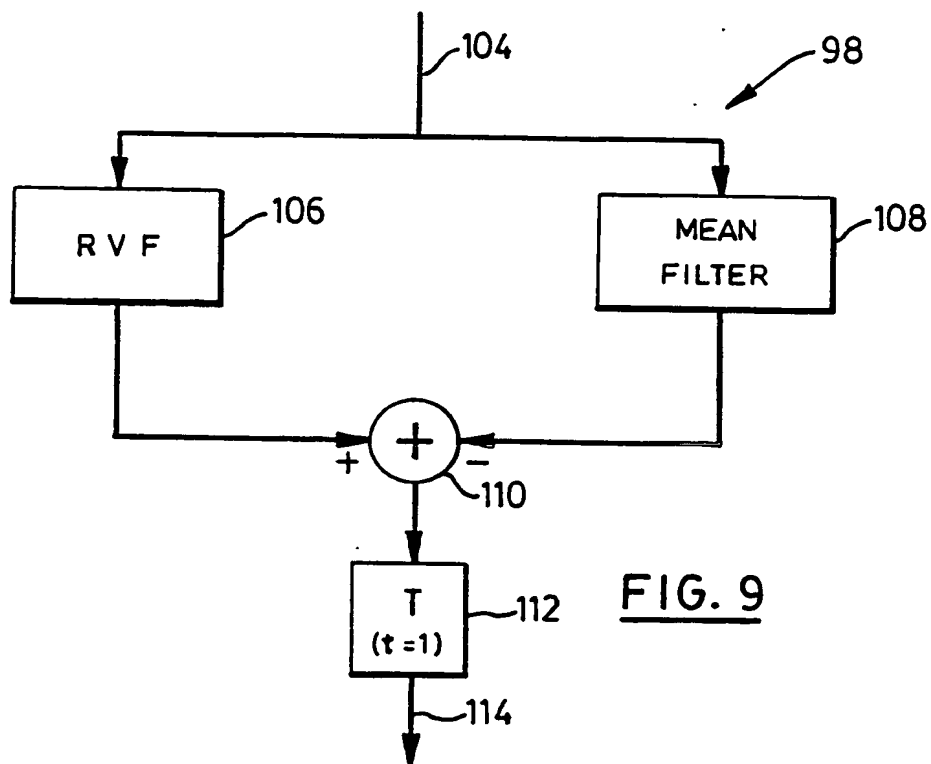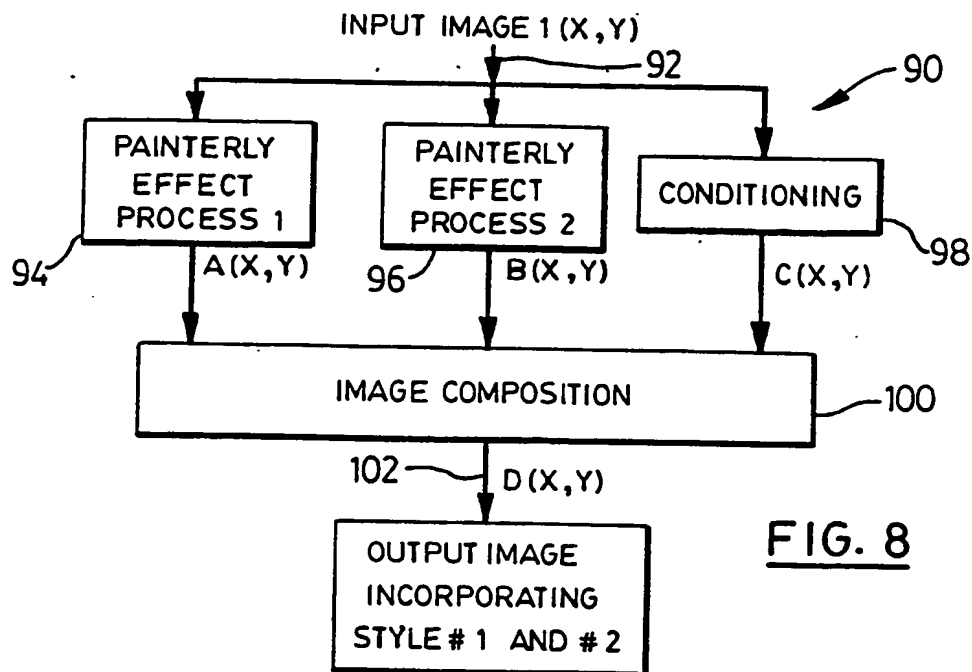

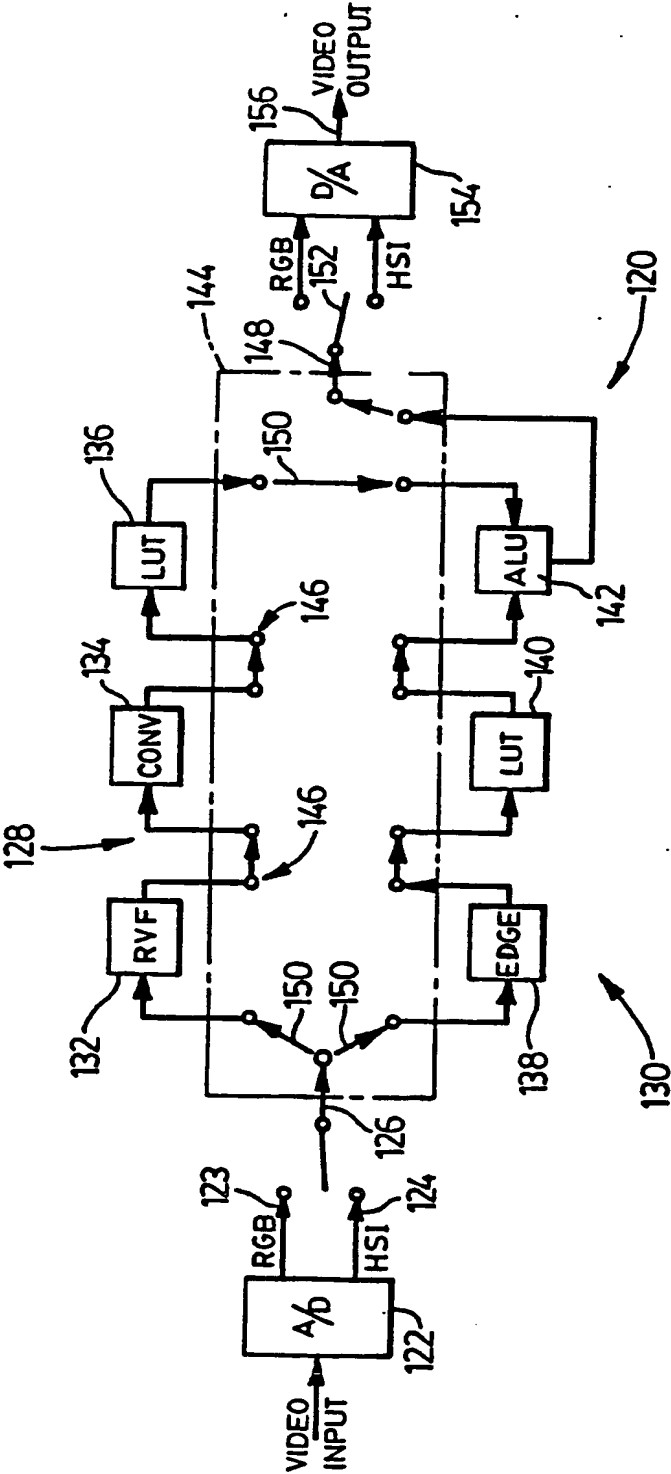


FIG. 10

INTERNATIONAL SEARCH REPORT

International Application No. PCT/CA 90/00246

I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all) ⁶ According to International Patent Classification (IPC) or to both National Classification and IPC IPC ⁵ : H 04 N 1/40														
II. FIELDS SEARCHED <div style="text-align: center; font-size: small;">Minimum Documentation Searched ⁷</div> <table style="width: 100%; border: none;"> <tr> <td style="width: 50%; border: none;">Classification System ¹</td> <td style="width: 50%; border: none;">Classification Symbols</td> </tr> <tr> <td style="border: none; padding-top: 10px;">IPC⁵</td> <td style="border: none; padding-top: 10px;">H 04 N</td> </tr> </table> <div style="text-align: center; font-size: x-small; margin-top: 10px;">Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched ⁸</div>			Classification System ¹	Classification Symbols	IPC ⁵	H 04 N								
Classification System ¹	Classification Symbols													
IPC ⁵	H 04 N													
III. DOCUMENTS CONSIDERED TO BE RELEVANT ⁹ <table border="1" style="width: 100%; border-collapse: collapse; font-size: x-small;"> <thead> <tr> <th style="width: 10%;">Category ⁹</th> <th style="width: 70%;">Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²</th> <th style="width: 20%;">Relevant to Claim No. ¹³</th> </tr> </thead> <tbody> <tr> <td style="text-align: center; vertical-align: top;">A</td> <td style="vertical-align: top;">DE, A, 3546135 (CANON) 14 August 1986 see page 15, line 26 - page 13, line 1 --</td> <td style="vertical-align: top;">1-4,8,10, 12-15,19, 20</td> </tr> <tr> <td style="text-align: center; vertical-align: top;">A</td> <td style="vertical-align: top;">Proceedings of the Seventeenth Annual Allerton Conference on Communication, Control, and Computing, 10-12 October 1979, Allerton House, Monticello, Illinois, V.K. Aatre et al.: "Median filtering", pages 886-895 see the whole article --</td> <td style="vertical-align: top;">1-5,10,12-16,20</td> </tr> <tr> <td style="text-align: center; vertical-align: top;">A</td> <td style="vertical-align: top;">1987 IEEE International symposium on Circuits and Systems, volume 1 of 3, 4-7 May 1987, Philadelphia, PA, IEEE, J.-H. Lee et al.: "A fast algorithm for two-dimensional Wilcoxon filtering", pages 268-271</td> <td style="vertical-align: top;">1,10,12,20 ./.</td> </tr> </tbody> </table>			Category ⁹	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³	A	DE, A, 3546135 (CANON) 14 August 1986 see page 15, line 26 - page 13, line 1 --	1-4,8,10, 12-15,19, 20	A	Proceedings of the Seventeenth Annual Allerton Conference on Communication, Control, and Computing, 10-12 October 1979, Allerton House, Monticello, Illinois, V.K. Aatre et al.: "Median filtering", pages 886-895 see the whole article --	1-5,10,12-16,20	A	1987 IEEE International symposium on Circuits and Systems, volume 1 of 3, 4-7 May 1987, Philadelphia, PA, IEEE, J.-H. Lee et al.: "A fast algorithm for two-dimensional Wilcoxon filtering", pages 268-271	1,10,12,20 ./.
Category ⁹	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³												
A	DE, A, 3546135 (CANON) 14 August 1986 see page 15, line 26 - page 13, line 1 --	1-4,8,10, 12-15,19, 20												
A	Proceedings of the Seventeenth Annual Allerton Conference on Communication, Control, and Computing, 10-12 October 1979, Allerton House, Monticello, Illinois, V.K. Aatre et al.: "Median filtering", pages 886-895 see the whole article --	1-5,10,12-16,20												
A	1987 IEEE International symposium on Circuits and Systems, volume 1 of 3, 4-7 May 1987, Philadelphia, PA, IEEE, J.-H. Lee et al.: "A fast algorithm for two-dimensional Wilcoxon filtering", pages 268-271	1,10,12,20 ./.												
<div style="display: flex; justify-content: space-between; font-size: x-small;"> <div style="width: 45%;"> <p>¹⁰ Special categories of cited documents:</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="width: 45%;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"&" document member of the same patent family</p> </div> </div>														
IV. CERTIFICATION <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%; padding: 5px; vertical-align: top;"> Date of the Actual Completion of the International Search <div style="text-align: center; font-size: large;">26th October 1990</div> </td> <td style="width: 50%; padding: 5px; vertical-align: top;"> Date of Mailing of this International Search Report <div style="text-align: center; font-size: large;">14 NOV. 1990</div> </td> </tr> <tr> <td style="width: 50%; padding: 5px; vertical-align: top;"> International Searching Authority <div style="text-align: center; font-weight: bold;">EUROPEAN PATENT OFFICE</div> </td> <td style="width: 50%; padding: 5px; vertical-align: top;"> Signature of Authorized Officer <div style="text-align: center;"> MISS J. TAZELAAR </div> </td> </tr> </table>			Date of the Actual Completion of the International Search <div style="text-align: center; font-size: large;">26th October 1990</div>	Date of Mailing of this International Search Report <div style="text-align: center; font-size: large;">14 NOV. 1990</div>	International Searching Authority <div style="text-align: center; font-weight: bold;">EUROPEAN PATENT OFFICE</div>	Signature of Authorized Officer <div style="text-align: center;"> MISS J. TAZELAAR </div>								
Date of the Actual Completion of the International Search <div style="text-align: center; font-size: large;">26th October 1990</div>	Date of Mailing of this International Search Report <div style="text-align: center; font-size: large;">14 NOV. 1990</div>													
International Searching Authority <div style="text-align: center; font-weight: bold;">EUROPEAN PATENT OFFICE</div>	Signature of Authorized Officer <div style="text-align: center;"> MISS J. TAZELAAR </div>													

III. DOCUMENTS CONSIDERED TO BE RELEVANT (CONTINUED FROM THE SECOND SHEET)		
Category *	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages	Relevant to Claim No.
	see the introduction --	
A	EP, A, 0216536 (CANON) 1 April 1987 see column 10, line 1 - column 11, line 38 --	1-21
A	DE, A, 3620261 (BRENNECKE) 23 December 1987 see claim 1; column 3, lines 30-50 -----	1,10,12,20

**ANNEX TO THE INTERNATIONAL SEARCH REPORT
ON INTERNATIONAL PATENT APPLICATION NO.**

CA 9000246
SA 38914

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report. The members are as contained in the European Patent Office EDP file on 12/11/90. The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE-A- 3546135	14-08-86	JP-A- 61157160	16-07-86
		JP-A- 61157161	16-07-86
		JP-A- 61157162	16-07-86
		JP-A- 61157163	16-07-86
		JP-A- 61157164	16-07-86
		JP-A- 61157165	16-07-86
		JP-A- 61157166	16-07-86
		JP-A- 61157167	16-07-86
		JP-A- 61157168	16-07-86
		JP-A- 61157169	16-07-86
		JP-A- 61157170	16-07-86
		GB-A- 2170373	30-07-86
EP-A- 0216536	01-04-87	JP-A- 62049781	04-03-87
		JP-A- 62049780	04-03-87
		JP-A- 62050977	05-03-87
		JP-A- 62050978	05-03-87
		JP-A- 62050979	05-03-87
		JP-A- 62092576	28-04-87
		JP-A- 62140550	24-06-87
		EP-A- 0212990	04-03-87
		US-A- 4870499	26-09-89
DE-A- 3620261	23-12-87	None	